



Locks for tilting garage doors

PRODUCT

Vertical installation locks for tilting garage doors.

OPERATION


The handle operates the locking bars
The key locks and unlocks the handle.

RANGE


- Locks with round cylinder and upper bar with pin or M6 or M8 threaded hole (643-644-645).
- Locks with Euro profile cylinder and upper bar with pin or M8 threaded hole (646-647).

TEXT FOR SPECIFICATIONS

Iseo 643-644-645-646-647 series vertical installation locks for tilting garage doors, with 020259 pin tumbler key.

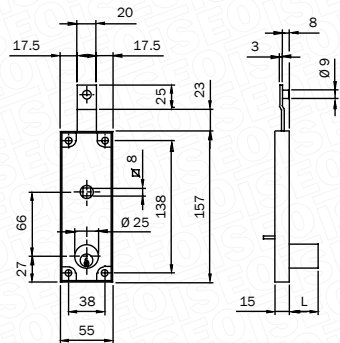

643 series

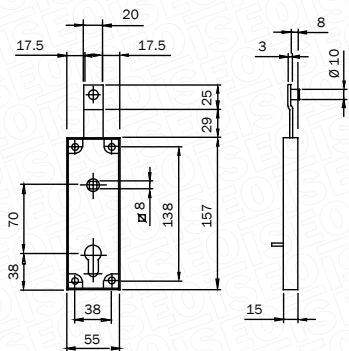

646 series



TECHNICAL FEATURES

- Case dimensions 157 x 55 mm
- Square handle spindle, 8 mm
- Bar travel, 25 mm
- Cylinder pair diameter, 25 mm
- Protrusion of outer round cylinder, 14 mm for all versions except model 643; 30 mm for 643
- 1 throw for cylinder locks.

HIGHLIGHTS

- Locks with similar dimensions to numerous existing models on the market for vertical installation, with handle function
- 25 mm bar travel for effective engagement in upper frame and/or floor
- Internal quick release lever for unlocking bars from interior side
- Bar connection points with 9 mm diam. x 8 mm pin (locks with round cylinder) 10 mm diam. x 8 mm pin (locks with Euro profile cylinder)
- Bar connection points with M6 or M8 threaded hole
- Usable with Euro profile cylinders with different security ratings for 646-647 series locks
- Blank pin tumbler key 020259