



778

**MORTICE LOCKS FOR
SLIDING GATES**

PRODUCT

The 778 mortice lock is installed on sliding fittings and ensures closure thanks to a deadbolt from which 2 opposing hooks emerge.

OPERATION


The key operates the deadbolt with 3 turns to bring out 2 hooks

RANGE:

- Mortice lock with hooks that withdraw into the deadbolt

TEXT FOR SPECIFICATIONS:

Mortice lock for sliding fittings with hooks that withdraw into the deadbolt. The deadbolt protrudes by 30.8 mm and the hooks emerge by 18.3 mm each in opposing positions with burglar-proof and unhooking function. The 4x25x195 mm faceplate ensures protection for the lock.

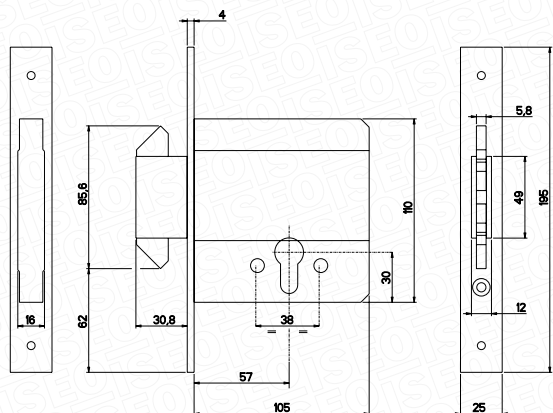

ISEO®

TECHNICAL FEATURES

Casing 61 mm
Frontal 25 x 4 x 195 mm
**European profile cylinder supplied as
standard 30-30 mm**

HIGHLIGHTS

- Galvanised steel lock.
- Deadbolt protruding by 31 mm with 3 turns.
- Two 18 mm hooks emerge in opposing positions to ensure closure of the sliding portion and prevent attempts to unhook it.
- When the key turns the deadbolt, in the initial stage the two hooks return inside the deadbolt itself.
- Due through-passing holes with 38 mm centres for possible cylinder guards.
- Faceplate thickness 4 mm

www.iseo.com