
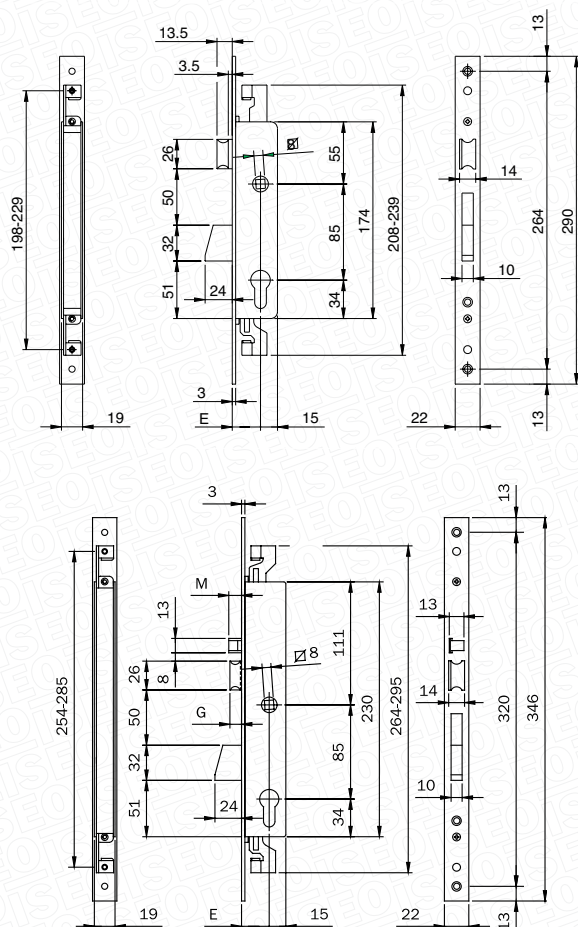


Electa

LOCK WITH
ROTARY DEADBOLT



PRODUCT:

The ELECTA lock with a classic rotary deadbolt is the ideal lock for glazed metal doors with jambs in aluminium or steel. Offered in a wide choice of versions with one or multiple latch points, these locks may be used together with the extensive range of Iseo cylinders to attain any desired degree of security.

OPERATING:

Standard version:

The key operates the deadbolts and retracts the latch.

The handle retracts the latch.

The electric pulse retracts the latch (electric locks).

Roller blind version:

The handle operates the latch.

The key locks and unlocks the handle.

RANGE:

Mechanical and electric locks.

Side latch, three-point and multiple point locks.

Locks with key function (standard)

or handle function (roller blind).

- Latch and Deadbolt.
- Roller and Deadbolt.
- Deadbolt only.
- Hook only, with 8 mm or 14 mm aperture.
- Top and bottom only.

ISEO®

TECHNICAL FEATURES

Centre distance: 85 mm

Case sizes: 25 - 30 - 35mm.

Square handle: 8 mm

Power: 12V AC/DC for electric locks.

Bevelled deadbolts to facilitate movement into and out of the strike plate.

Arm travel: 15.5 mm



Faceplates for side latch and three-point locks, with the following profiles:

- Flat 22x3mm, in stainless steel, for aluminium doors.
- Flat 24x3mm, in stainless steel, for aluminium and steel doors.
- Flat 24x3mm, in zinc plated steel, for steel doors.

Faceplates for multiple point locks, measuring 2300 mm in length and adjustable or with fixed length of 1860 mm, with the following profiles:

- U 24x6mm, in stainless steel or steel with black paint finish, for aluminium and steel doors.
- U 24x5mm, in stainless steel, for steel doors.
- Flat 24x3mm, in stainless steel or steel with black paint finish, for aluminium doors.

www.iseo.com

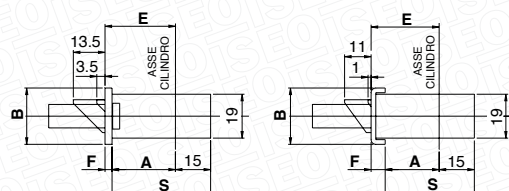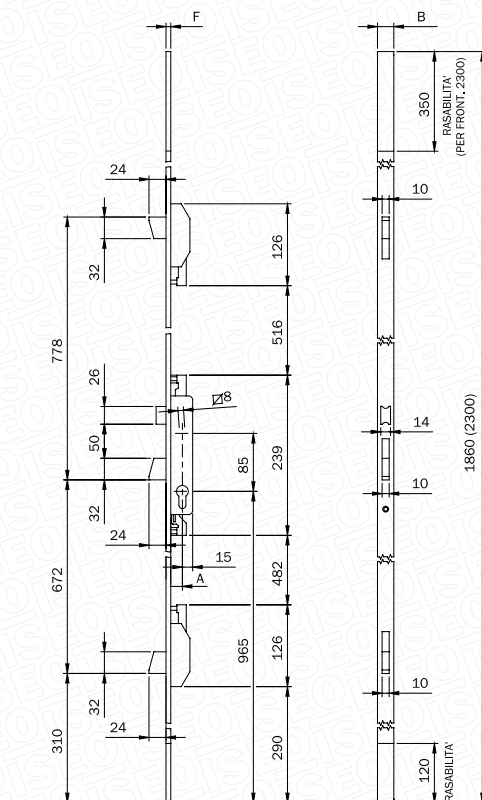

B	F	E	A	S
24	3	25	22	37
		30	27	42
		35	32	47

B	F	E	A	S
24	6	25	18	33
		30	23	38
		35	28	43

STANDARDS:

EN12209:2005

classification |3|X|8|0|0|G|2|H|A|2|0| - for side latch or three point latch and deadbolt locks.

classification |3|C|8|0|0|G|2|H|A|0|0| - for side latch or three point roller and/or deadbolt only locks.

classification |3|C|8|0|0|G|2|L|A|0|0| - for side latch or three point hook only locks.

prEN15685:2009

classification |3|X|8|A|0|G|2|0|1| - for multiple point latch and deadbolt locks.

classification |3|C|8|A|0|G|2|0|1| - for multiple point roller and/or deadbolt only locks.

TEXT FOR SPECIFICATIONS:

Iseo ELECTA rotary deadbolt side latch or three-point locks compliant with EN 12209:2005

classification |3|X|8|0|0|G|2|H|A|2|0| - for side latch or three point latch and deadbolt locks

classification |3|C|8|0|0|G|2|H|A|0|0| - for side latch or three point roller and/or deadbolt only locks

classification |3|C|8|0|0|G|2|L|A|0|0| - for side latch or three point hook only locks

Iseo ELECTA rotary deadbolt side multiple point locks compliant with prEN15685:2009

classification |3|X|8|A|0|G|2|0|1| - for multiple point latch and deadbolt locks

classification |3|C|8|A|0|G|2|0|1| - for multiple point roller and/or deadbolt only locks

Latch is adjustable from 10 to 15 mm, and deadbolt protrusion is 24 mm.

MATCHING ACCESSORIES:

- Arms and ferrules for top and floor latch points.
- Fastener systems for external arms, internal arms or threaded arms.
- Top/bottom deviators with rotary deadbolt.
- Adjustable strike plates in stainless steel or steel with black paint finish.
- Fixed strike plates in stainless steel, chrome plated steel or nylon.
- Adjustable strike plates measuring 2300 mm in length.
- Match series electric strike plates.

HIGHLIGHTS

- Reversible latch with protrusion adjustable by 5 mm (mechanical locks) for final adjustment of door on site.
- Reversible, self-locking latch with reversible, separate rearming piston (electric locks) for greater safety for condominium building, shop and public office entry doors.
- Dimensions compatible for applications in all intended markets: centre-to-centre spacing 85 mm, case sizes 25, 30, 35 mm, flat faceplates and U shaped faceplates in a wide choice of cross sections to cater for all profiles.
- Deadbolt protrusion 24 mm to ensure that the deadbolts themselves engage securely and deeply in the respective strike plates, even on doors with a significant step between the frame and the leaf.
- The rear of the lock casing is open to permit installation of a cross key cylinder, or, alternatively, of a standard Euro profile cylinder.