




## USER MANUAL

F9000 Mobile app  
Settings and use

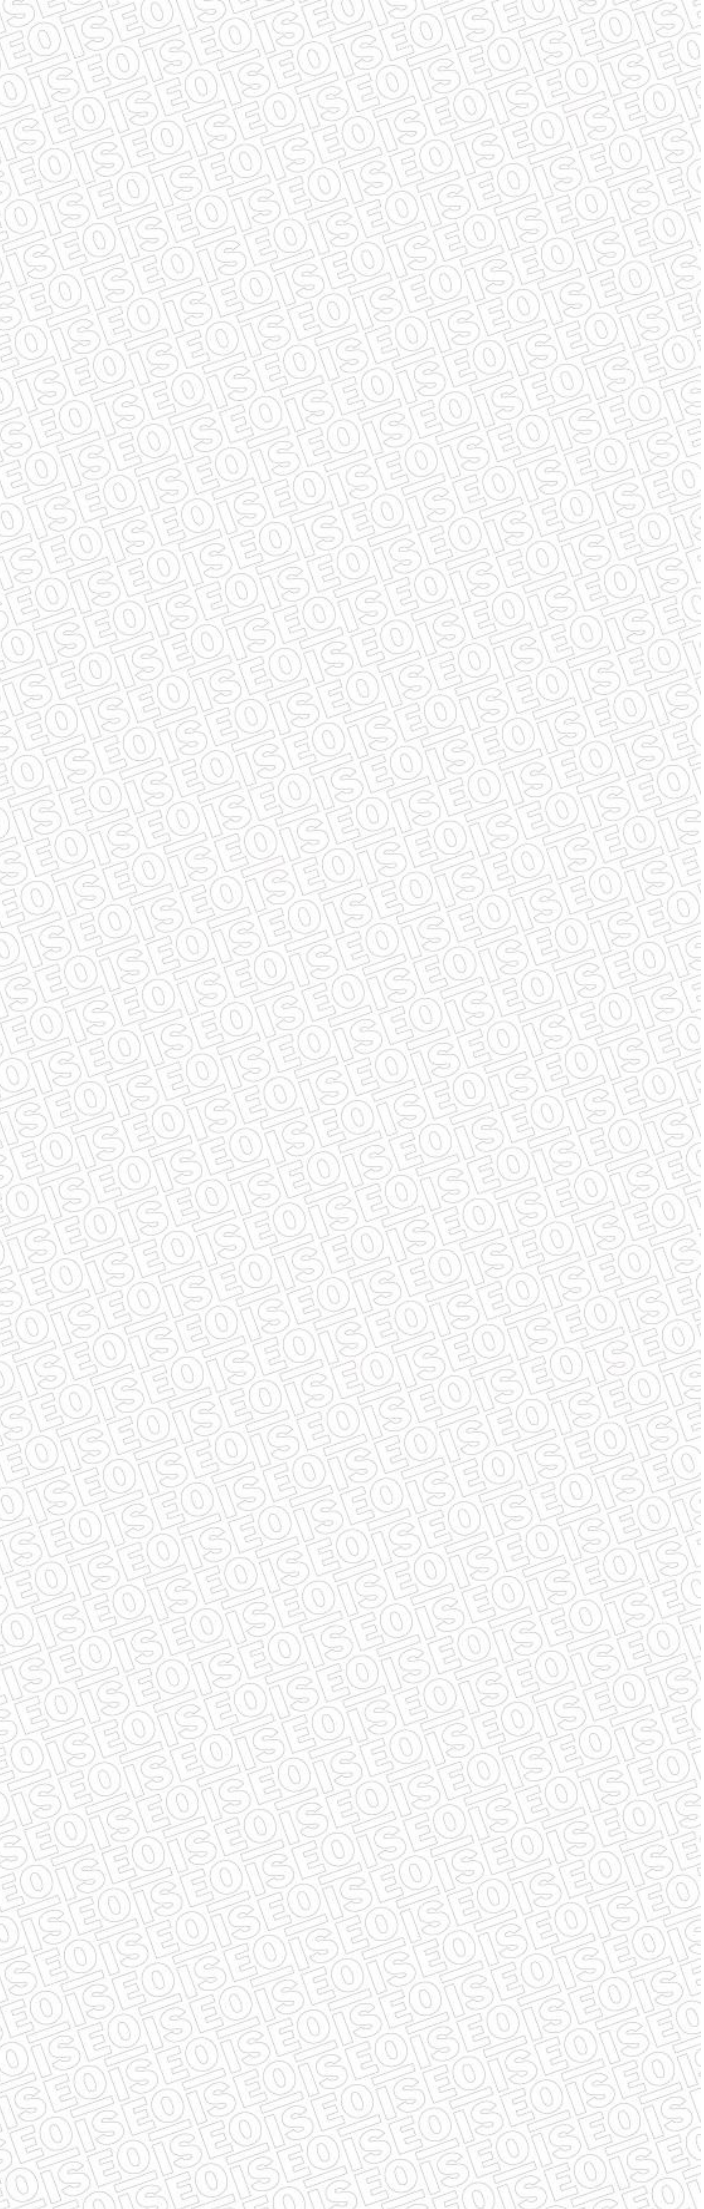

## How to use this manual

Thanks for choosing this innovative ISEO product.

This user manual was compiled to offer a guide on the installation and use of the F9000 Mobile Validator.

For the installation of the devices, set-up of the opening and other operations not described herein, refer to the installation and configuration manuals, available in the download area of ISEO Zero1's website, at:

[www.iseozero1.com](http://www.iseozero1.com)

**The installation, initial set-up and changes to the setting, require the intervention of qualified staff, properly trained by ISEO Zero1.**

- Read this manual prior to use the device in order to ensure a safe and proper use
- Preserve this manual as future reference

## Informative icons

Please familiarise with the icons below, for an easy reading of the manual:



**Warning:** it indicates situations that could cause harm to people or animals



**Be careful:** it indicates situations that could cause damages to the device or other equipment



**Note:** it indicates notes, suggestions and additional information

## Information on copyright

The rights concerning all technologies and products which are part of this device, belong to the relative holders.

## F9000 Mobile – Install the app




Install the F9000 Mobile app from the site: [app.iseo.com](http://app.iseo.com) and check the list of the supported devices.

## F9000 Mobile – Configuration



Before using this app, enable the bluetooth on your smartphone/tablet.

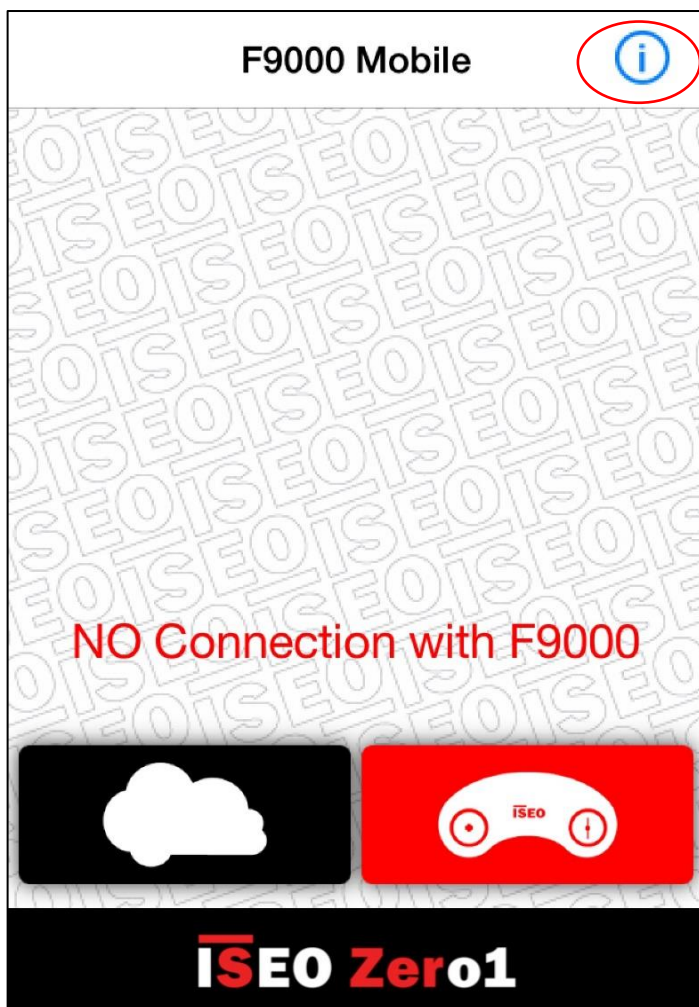

Open the app and select the icon:



These two icons show you the status of the internet connection (on the left) and the bluetooth connection with the F9000 Mobile Validator (on the right).

If the background colour is:

**BLACK** = the connection is ON

**BLUE** = an operation is in progress

**RED** = the connection is OFF

<

F9000 Mobile

Info



Software Version

F9000 Mobile Version

1.0.2

F9000 Mobile Software

MH0Z3021

ATLAS Server

IP Address

Port

F9000 Mobile Programmer

Device Name

<

Info

Configuration

Configuration Login

Request Password



Atlas server

IP Address

62.160.30.136

Port

22

F9000 Mobile Programmer

Device Name

>

Set the parameters selecting the icon: 

If you use the F9000 Mobile Validator in your network, set the IP Address and Port defined on the Ethernet Gateway (see its configuration). Otherwise you have to set a public IP Address and Port reachable from the outside of your network. Ask about it to your network administrator.

Search the Mobile Validator selecting the icon: 

< Configuration

Configuration Device

Device Configuration

Device001542015D5C

Firmware VersionMH0Z3021

Firmware Update

Scan

001542012D4C

Select «Scan».

Select the right Mac Address of your Mobile Validator (printed on the label on the bottom of your device) to pair it with your smartphone/tablet.

001542012D4C

Confirm device selection?

NoYes

Select «Yes» as confirm.

••••• vodafone IT 4G 09:18

< Configuration

Configuration Device

Device Configuration

Device Name001542012D4C

Firmware VersionMH0Z3021

Pairing Done

001542012D4C

Wait for the message «Pairing Done».


F9000 Mobile – Use




To be validated with success the offline key must be preventively managed by the Access Control software.

Follow the instructions in the home page to validate the CSF Key.

Example with a key programmed succesfully:

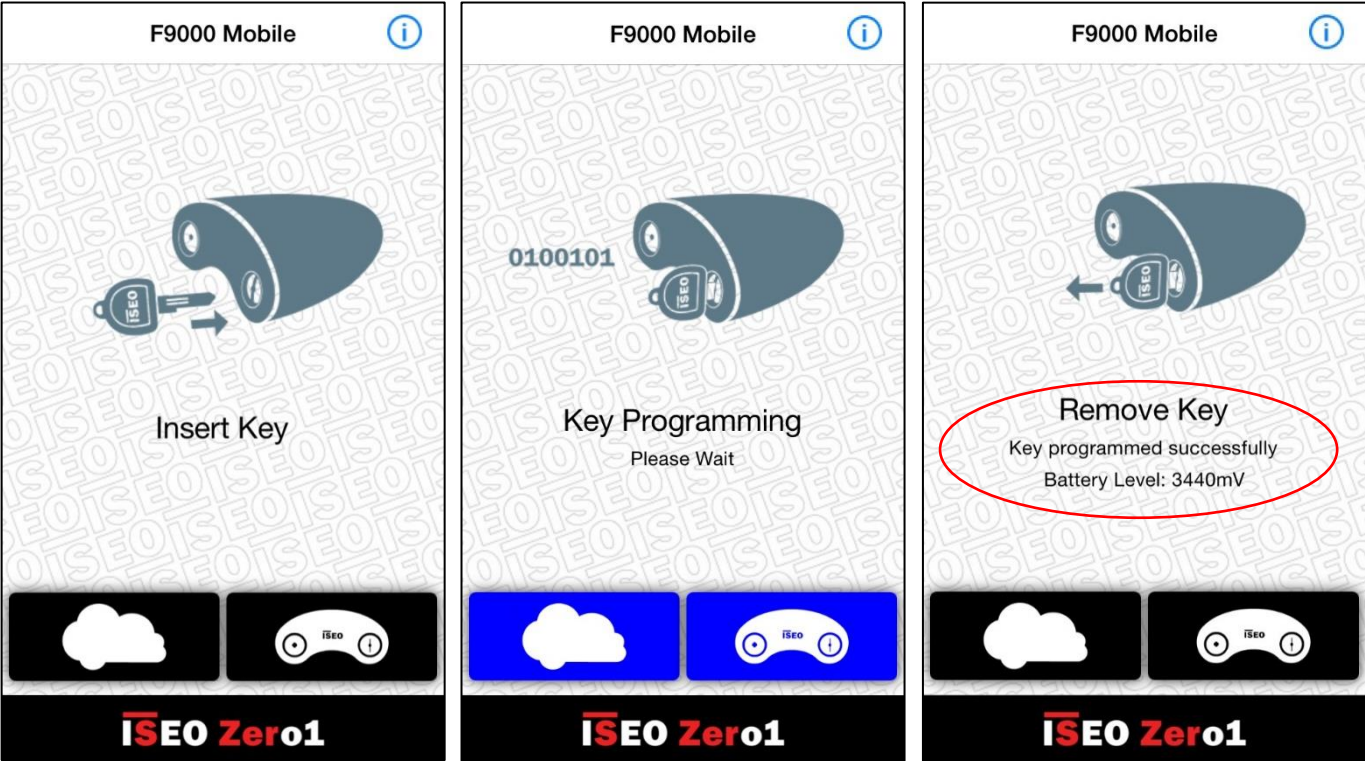

Example with a key programmed unsuccessfully:

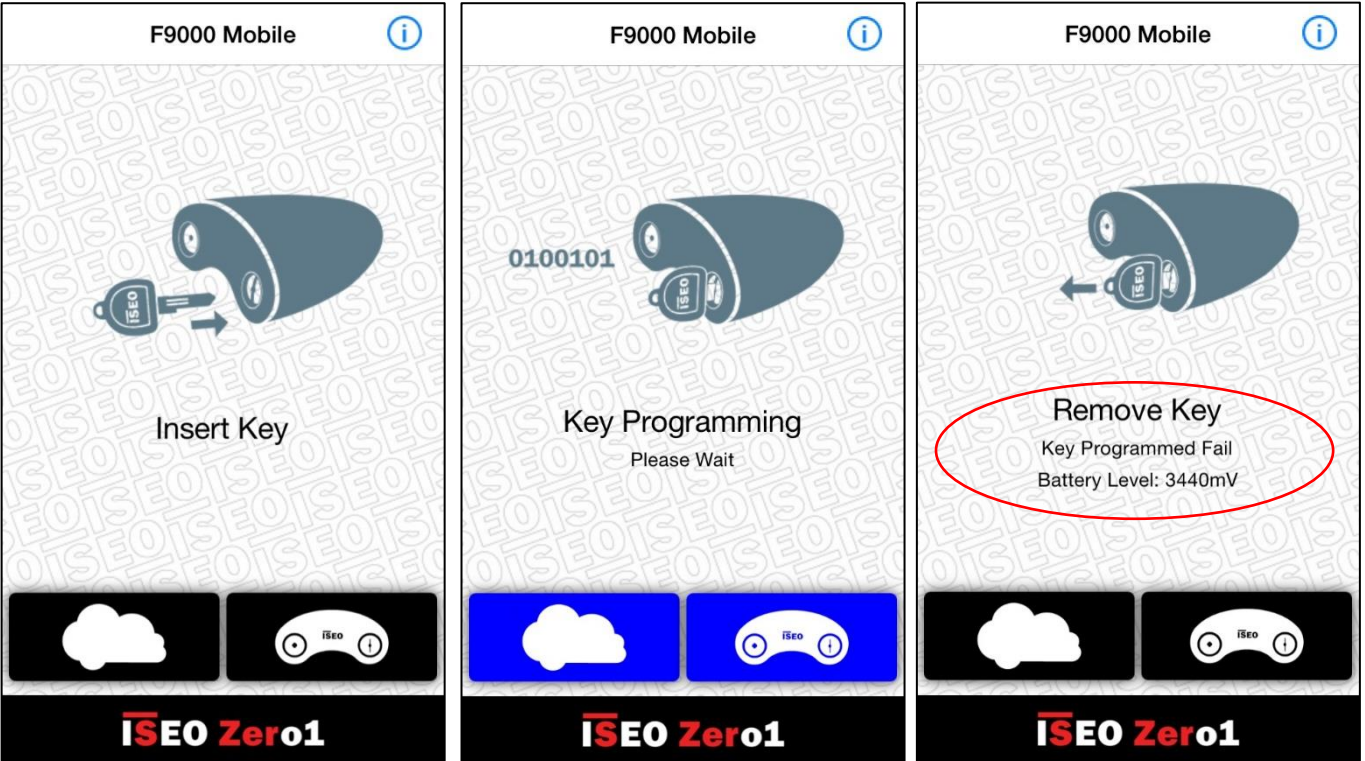



[www.iseo.com](http://www.iseo.com)

**Iseo Serrature s.p.a.**  
Via San Girolamo 13  
25055 Pisogne (BS)  
Italy  
Tel +39 0364 8821  
Fax +39 0364 882263  
[iseo@iseo.com](mailto:iseo@iseo.com)

**Iseo Serrature s.p.a.**  
Via Don Fasola 4  
22069 Rovellasca (CO)  
Italy  
Tel +39 02 96740420  
Fax +39 02 96740309  
[www.iseozero1.it](http://www.iseozero1.it)

**ISEO Zero1**  
ELECTRONIC SUPPORT SERVICE  
[iseozero1@iseo.com](mailto:iseozero1@iseo.com)

**800-728722**  
numero verde gratuito