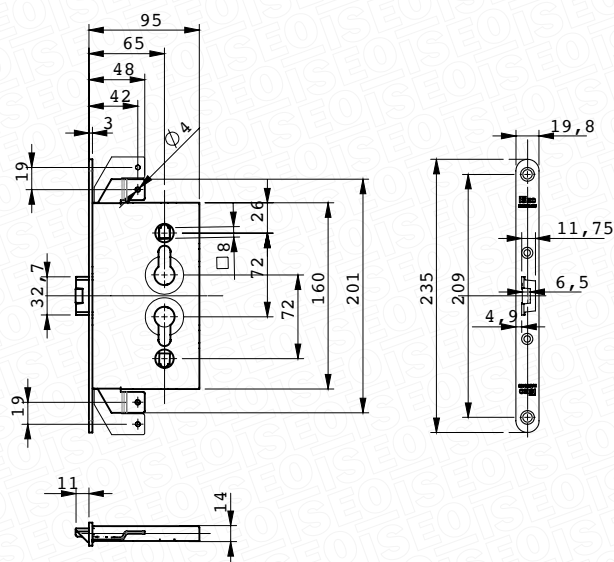


**653****MULTI-PURPOSE TRIPLE LOCK****PRODUCT:**

The 653 series triple mortice lock is usually fitted to metal doors; a typical application is with cellar doors.

**OPERATION:**

Turning the handle upwards move the bars out.

Turning the handle downwards, the bars and latchbolt move in.

The key always moves the latchbolt in.

When the bars are turned, the key pushes the deadbolt out and blocks the handle.

When the bars are in, the key only turns the latchbolt and the deadbolt does not emerge.

**RANGE:**

- Triple lock

**TEXT FOR SPECIFICATIONS:**

The 653 Iseo series triple mortice lock is reversible thanks to the dual cylinder and handle hole. Case size 65 mm. Centre-to-centre spacing 72 mm. Overall lock dimensions 95 x 14 x 160 mm, faceplate 19.8 x 3 x 235 mm. deadbolt built into the latchbolt, protruding by 11 mm. Pre-set for 3-point closure with a travel of 19 mm.

**ISEO®****TECHNICAL FEATURES**

- Case size 65 mm.
- Centre-to-centre spacing 72 mm.
- Faceplate 20 x 3 x 235 mm, in galvanised steel
- 8 mm square handle spindle
- Latchbolt protruding by 11 mm
- Casing thickness 14 mm
- Works with euro profile cylinder.

**HIGHLIGHTS**

- Reversible lock thanks to the dual cylinder/handle hole and latchbolt/deadbolt on the horizontal axis
- Pre-set for triple closure with a travel of 19 mm.
- Same dimensions (interchangeable) with the 65 side entry lock

[www.iseo.com](http://www.iseo.com)