


8000 SLAVE Series

MULTIPOINT LOCK
FOR PVC FRAMES

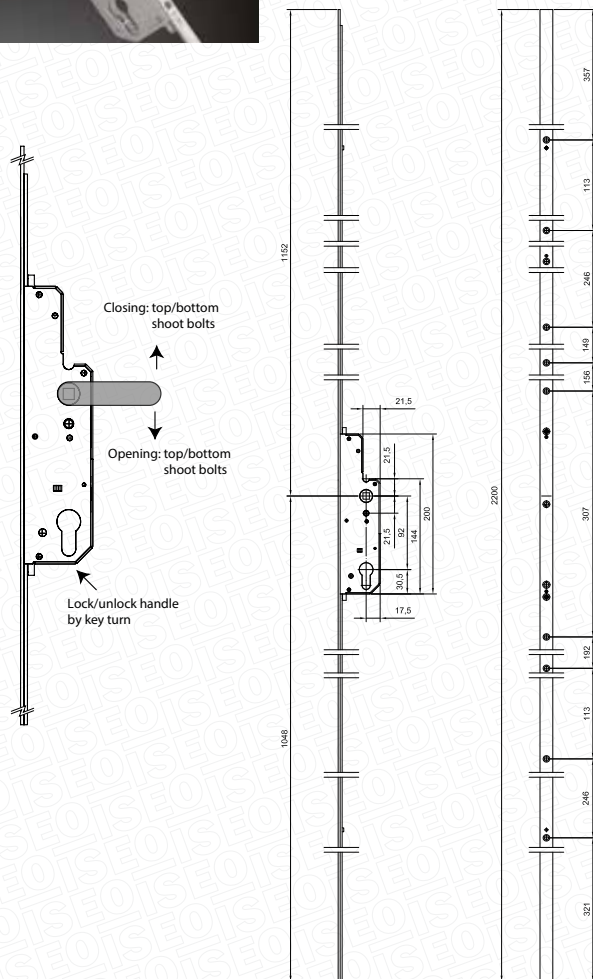

PRODUCT:

The 8000 Slave handle-operated multipoint lock is suitable for double PVC or wooden doors; it locks the semi-fixed door thanks to the top and bottom shootbolts.

OPERATION:

By turning the handle upwards by about 40°, the shootbolts get inserted into the top frame and floor. By turning the handle downwards by about 40°, the top and bottom shootbolts are retracted. In both cases the handle returns to its horizontal position. A turn of the key deactivates/activates the handle.

RANGE:

- Multipoint lock with top and bottom shootbolts only.

SPECIFICATION TEXT:

Iseo 8000 Slave series multipoint lock for double PVC or wooden doors with handle-operated shootbolt movement to ensure closure of the semi-fixed door. A double door requires an additional central facing profile and a handle for each leaf.

ACCESSORIES TO BE COMBINED:

- IM80 upper shootbolt, with reverse movement, for closure to the upper frame.
- TM80 lower shootbolt, with direct movement, for locking to the floor.

ISEO®

TECHNICAL FEATURES

Centre-to-centre: distance 92mm.

Backsets: 35 - 45mm.

Handle spindle hole: 8mm.

Front plate with 16x2.5mm cross-section.

Through hole and useful case size for fixing the handles with a plate.

Operation with European profile cylinder.

KEY FEATURES

- **Handle-operated bar movement.**
- **20 mm bar travel, with unidirectional movement.**
- **2200 mm long front plate, trimmable by 250 mm top and bottom.**
- **The lock is complete with the shootbolts separate.**
- **Reversible lock.**
- **Fitting to a double door requires the addition of a central facing profile and the use of a handle for each door.**

www.iseo.com