

A close-up photograph of a modern, metallic door handle and lock assembly. The handle is sleek and horizontal, with a cylindrical lock cylinder in the center. The background is a light, textured surface.

Horizontal adjustable device for synchronising door closure

The door leaf closing order selector device is integrated within a sliding arm with a stylish design installed on the head beam of the door frame on the inner side. This device controls the closing order of the door leaves by arresting closure of the service leaf until the semi-fixed leaf has closed completely.

Three models are available, differing in the maximum permissible width of each door leaf.

- 379883N3 with IS65 = maximum door leaf width: 950 mm
- 379883N4 with IS115 = maximum door leaf width: 1100 mm
- 379883N5 with IS315 = maximum door leaf width: 1250 mm

■ **DS90**

A carry bar device which ensures that the leaves close in the correct order if the doors are opened incorrectly by a user pushing the fixed leaf only.

CE marking in accordance with the standard EN1158

3 5 5/3 1 1 3

CE marking in accordance with the standard EN1154

For door closer IS65


4 8 3 1 1 3

For door closer IS115

4 8 4/2 1 1 3

For door closer IS315

4 8 5/3 1 1 3

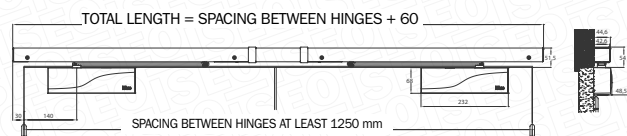

TECHNICAL FEATURES:

May be used with door closers with closing force ratings of 3 and 5, with doors up to 1250 mm in width.

Installation: On pull side of door.

Adjustment: adjustable door closing and opening speed settings, depending on door closer used.

- With IS65: closing speed.
- With IS115: closing speed, opening resistance.
- With IS315: closing speed, opening resistance, timer function.

Finish:

Silver paint finish and anodised aluminium.

KEY FEATURES:

- Adjustable in length by simply cutting the two aluminium profiles to the same length.
- A choice of two enclosures ensure an impeccably stylish installation that complements the surrounding décor.
- As the entire mechanism is housed within the sliding arm with a stylish design and finish, this product combines elegance with vandal-proof safety.
- Supplied complete, together with 2 door closers.